

MDG Renovations

Bruning Kitchen doors

Quote #: J5SSVD4

A Proposal for Window and Door Products prepared for:

Job Site:
63124

Shipping Address:

MCINTYRE MILLWORK & HARDWOOD SUPPLY
260 OLD STATE RD
ELLISVILLE, MO 63021-5916

MCINTYRE MILLWORK
& HARDWOOD SUPPLY, INC.

RYAN MCINTYRE
MCINTYRE MILLWORK & HARDWOOD
SUPPLY

260 OLD STATE RD
ELLISVILLE, MO 63021

Phone: (636) 391-8100

Fax: (636) 391-8100

Email: ryan@mcintyremillwork.com

This report was generated on 10/6/2026 10:09:44 AM using the Marvin Order Management System, version 0004.23.00 (Current). Price in USD. Unit availability and price are subject to change. Dealer terms and conditions may apply.

Featuring products from:

MARVIN 

UNIT SUMMARY

The following is a schedule of the windows and doors for this project. For additional unit details, please see Line Item Quotes.
Additional charges, tax or Terms and Conditions may apply. Detail pricing is per unit.


NUMBER OF LINES: 1 TOTAL UNIT QTY: 1

LINE	MARK UNIT	PRODUCT LINE	ITEM	QTY
4		Ultimate	Inswing French Door G2	1

LINE ITEM QUOTES

The following is a schedule of the windows and doors for this project. For additional unit details, please see Line Item Quotes. Additional charges, tax or Terms and Conditions may apply. Detail pricing is per unit.

Line #4	Mark Unit:			
Qty: 1				

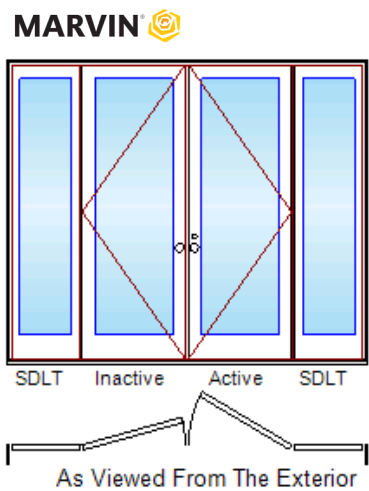

FS 119" X 98"
Egress Information
Width: 65 1/16" Height: 94 3/8"
Net Clear Opening: 42.64 SqFt
Performance Information
U-Factor: 0.3
Solar Heat Gain Coefficient: 0.24
Visible Light Transmittance: 0.4
CPD Number: MAR-N-476-02885-00009
Performance Grade
Licensee #1163
AAMA/WDMA/CSA/101/I.S.2/A440-11
LC-PG30 4242X2489 mm (167X98 in)
Water Resistance: 6.06 psf
LC-PG30 DP +30/-30
FL39753
Paint Specification
Clad Exterior Color: AAMA 2605

Coconut Cream Clad Exterior
Primed Pine Interior
Ultimate Inswing French Door G2 6 9/16" - SLXXSL Right Hand
Frame Size 119" X Call Number 80
Rough Opening 120" X 98 1/2"
Unequal Custom Panels
Left Panel
OM 23 1/8" X CN 80
Coconut Cream Clad Sash Exterior
Primed Pine Sash Interior
IG - 1 Lite
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Left Center Panel
OM 35" X CN 80
Coconut Cream Clad Sash Exterior
Primed Pine Sash Interior
IG - 1 Lite
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Right Center Panel
OM 35" X CN 80
Coconut Cream Clad Sash Exterior
Primed Pine Sash Interior
IG - 1 Lite
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Right Panel
OM 23 1/8" X CN 80
Coconut Cream Clad Sash Exterior
Primed Pine Sash Interior
IG - 1 Lite
Tempered Low E2 w/Argon
Black Stainless Steel Perimeter Bar
Putty Exterior Glazing Profile
Ogee Interior Glazing Profile
Standard Bottom Rail
Multi-Point Lock on Active Panel
No Handle Set on Active Panel
Multi-Point Lock on Inactive Panel
No Handle Set on Inactive Panel
Goldtone Adjustable Hinges 3 Per Panel-
Ebony Performance Sill
Black Weather Strip
6 9/16" Jamb
Thru Jamb Installation w/ Nailing Fin
Skid Plate Applied
***Note: Unit Availability and Price is Subject to Change

PRODUCT AND PERFORMANCE INFORMATION

NFRC Ratings:


NFRC energy ratings may vary depending on the exact configuration of glass thickness used on the unit. NFRC energy values and ratings may change over time due to ongoing product changes, updated test results or requirements. NFRC values and ratings are finalized on the date of manufacture.

The National Fenestration Rating Council (NFRC) has developed and operates a uniform rating system for the energy performance of fenestration products, including windows, doors and skylights. For additional information regarding this rating system, see www.nfrc.org.

Code (residential, building or energy) Compliance:

Determining the suitability and compliance with state, provincial, local, or other applicable building codes or standards, including energy codes, is the responsibility of the buyer, user, architect, contractor, installer, and/or other construction professional.

2021 IECC Climate Zone Map:

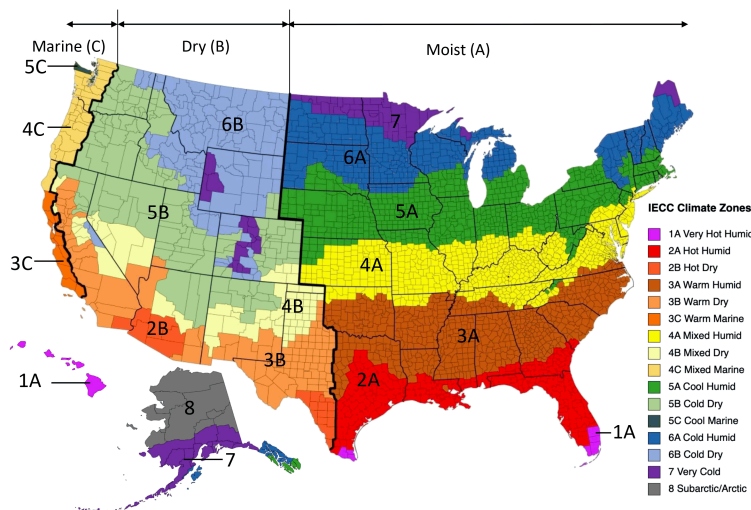

ENERGY STAR Version 7 Climate Zone Map:

