

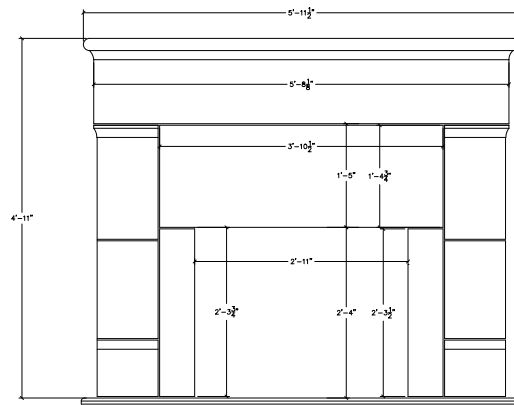


GENERAL NOTES


- 1) ALL CUT STONE JOINTS TO BE 1/4" UNLESS SHOWN OTHERWISE.
- 2) 1/4" CAULK JOINT AROUND ALL WINDOWS & DOORS - TYPICAL UNLESS SHOWN OTHERWISE.
- 3) DAMPROOF ALL SURFACES BELOW GRADE AND 18" MIN ABOVE GRADE.
- 4) RINSE STONE WITH CLEAN WATER BEFORE SETTING.
- 5) CONTRACTOR TO FIELD VERIFY ALL DIMENSIONS PRIOR TO FABRICATION.
- 6) REFER TO "CONTRACTOR'S HANDBOOK" FOR CLEANING INSTRUCTIONS.
- 7) USE NON-STAINING MORTAR ONLY.




FRONT ELEVATION

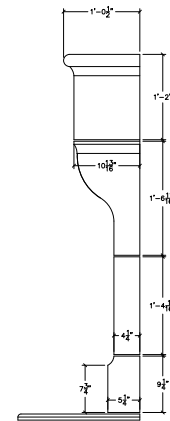

SIDE ELEVATION

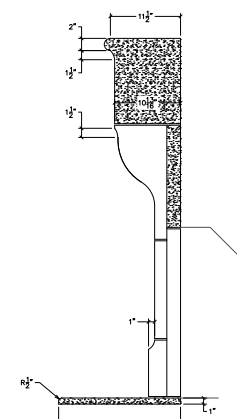

SECTION VIEW

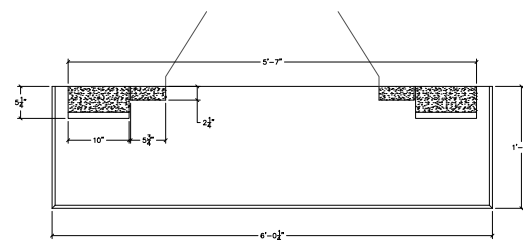

PLAN SECTION

8/25/26

W. C. W. W.

DATE:
8/21/26
SCALE:
1-1/2"=1'
SHEET NO.:

A1