



My Reveal Project

For help with questions about the specifications provided for your configuration, call us toll-free between 8am-5pm CST at [\(866\) 689-9653](tel:8666899653).

Disclaimer: We strongly recommend saving all Reveal configurations to "My Sub-Zero Account" to ensure the most up-to-date specification information is reflected on your shared documents as product specifications are subject to change without notice. Otherwise, we suggest that this configuration be recreated prior to finalizing your cabinetry enclosures. The reveal listed in this configuration is the minimum reveal suggested by the manufacturer. After extensive research, Sub-Zero simplified the naming of our refrigeration product lines to be more descriptive and distinct for our consumers. Built-In is now referred to as Classic, and Integrated is now referred to as Designer. Model numbers currently remain unchanged.

Group 1: Flush Inset Installation

Specifications:

Specifications Summary

Planning Notes

Front View

Side View

Top View

WWD30 Panel Specifications

Panel Planning Notes

MDD3050PM/S/P Additional Requirements


WWD30 Additional Requirements



MDD3050PM/S/P
30" M Series Professional Drop-Down Door Microwave Oven



WWD30
30" Warming Drawer



808152
30" Integrated Warming Drawer Front Panel

Notes : Additional accessories are available for this installation. Please ask your local retailer for more information.

Specifications Summary

Group 1

SECTION A

MODEL	OVERALL DIMENSIONS	OPENING DIMENSIONS	CLEAT DEPTH	TRIM OVERLAP	BASE SUPPORT
MDD3050PM/S/P - Model Detail CAD Libraries: 2D AutoCad (DWG) AutoCad (DXF) ArchiCad (GSM) Revit Files (RFA) SketchUp (SKP) 3D Studio Max (3DS) 3D Studio Max (MAX) Wavefront 3D (OBJ) User Guides: QR SHEET Wolf Design Guide	29 ⁷ / ₈ " W 17 ¹¹ / ₁₆ " H 20" D	30 ¹ / ₈ " W 18 ¹ / ₈ " H 23" D	⁷ / ₈ "	³ / ₁₆ " Top 0" Bottom 3 ⁷ / ₈ " Sides	125 lbs
WWD30 - Model Detail CAD Libraries: 3D Studio Max (3DS) 3D AutoCad (DWG) 2D AutoCad (DWG) AutoCad (DXF) ArchiCad (GSM) 3D Studio Max (MAX) Wavefront 3D (OBJ) Revit Files (RFA) SketchUp (SKP) User Guides: QR SHEET Wolf Design Guide w/ Trim Kit 30" Integrated Warming Drawer Front Panel (808152) Add 1/4" (6) to the panel thickness to determine the flush inset cleat depth.	29 ⁷ / ₈ " W 10 ³ / ₈ " H 22 ³ / ₄ " D	30 ¹ / ₈ " W 10 ⁵ / ₈ " H 24" D	1"	⁵ / ₈ " Top ⁵ / ₈ " Bottom ⁵ / ₈ " Sides	200 lbs

Planning Notes

Group 1

Cleats will be visible and should be finished to match the cabinetry.

If two products with different reveals are specified, the larger reveal must be used.

Dimensions provided assume minimum allowable reveals.

Microwaves

MDD3050PM/S/P: A minimum 1/8" (3) reveal is required on all sides.

Warming Drawers

The warming drawer must be installed with a Wolf drawer front. A panel mounting kit is required when installing a custom panel. The panel mounting kit is available through an authorized Wolf dealer.

For a standard installation, the drawer collar and front panel sit proud of the cabinet face frame. A recessed installation requires the cabinetry be recessed by 3/16" (5) so the collar is flush with the cabinet face frame but the drawer front will sit proud. A flush inset installation requires the drawer collar and front panel be recessed to be flush with surrounding cabinetry.


Custom front panel flush inset depth is dependent on the panel thickness. Add 1/4" (6) to the panel thickness to determine the flush inset cleat depth.

A minimum 1/8" (3) reveal is required on all sides.

Front View

Group 1


SECTION A



Top View

Group 1

SECTION A




Add 1/4" (6) to the panel thickness to determine the flush inset cleat depth.

Side View


Group 1

SECTION A

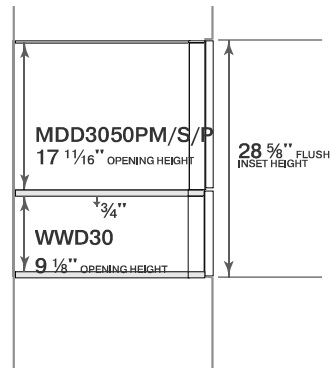

WWD30 Panel Specifications


Group 1

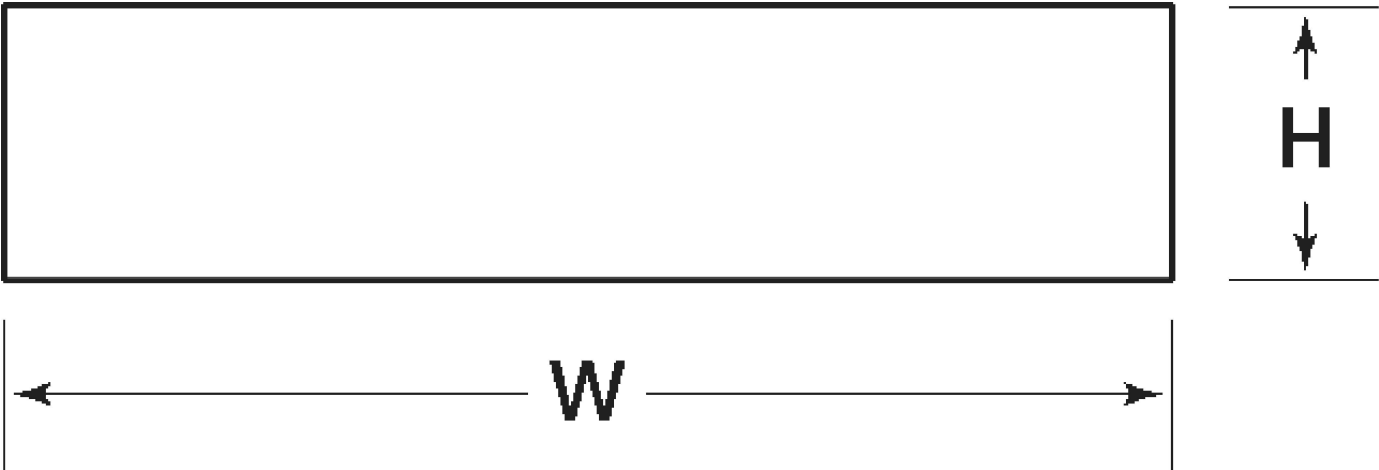

PANEL	WIDTH	HEIGHT	MIN THICKNESS	MAX WEIGHT
Drawer	29 7/8"	10 3/8"	5/8"	--

MDD3050PM/S/P Overall Dimensions

Group 1

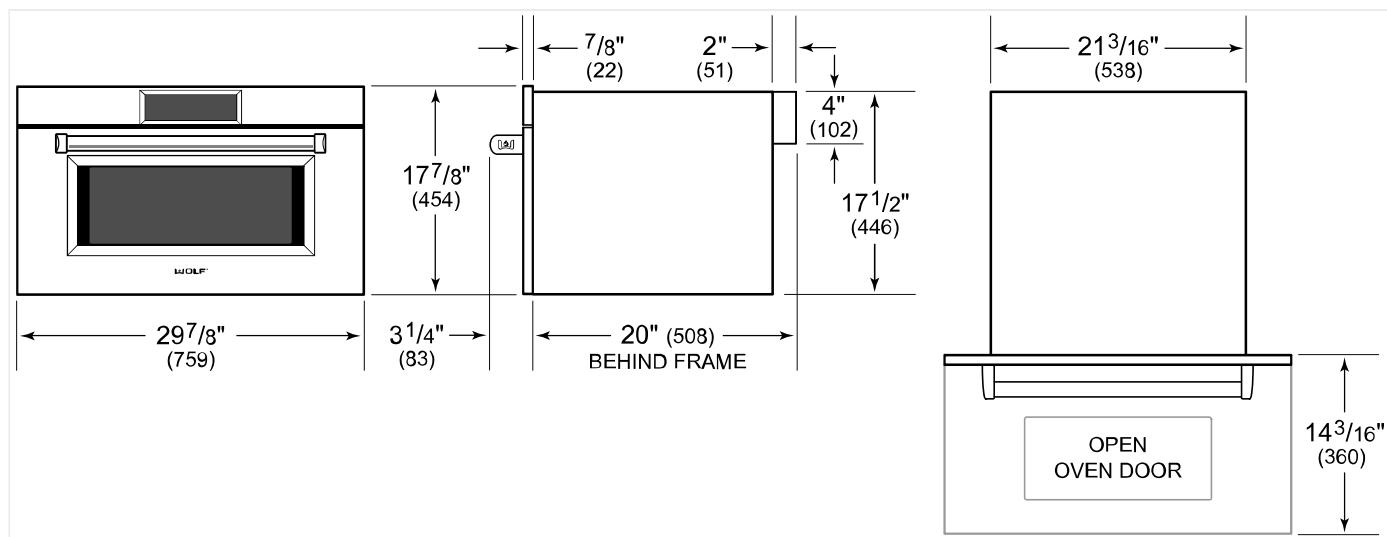

MDD3050PM/S/P Electrical

Group 1

E

ELECTRICAL
SUPPLY WITHIN OPENING
OR IN ADJACENT CABINET
WITHIN REACH OF
POWER CORD

E

Electrical Supply	grounded, 120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Power Cord Length	4 Feet
Receptacle	3-prong grounding-type

**WARNING**

Installation must comply with all applicable electrical codes.

WWD30 Electrical

Group 1



ELECTRICAL SUPPLY WITHIN
OPENING OR IN ADJACENT
CABINET WITHIN REACH OF
POWER CORD

Electrical Supply	grounded, 120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Power Cord Length	3 Feet
Receptacle	3-prong grounding-type

**WARNING**

Installation must comply with all applicable electrical codes.

For ease of installation, the electrical supply can be placed in an adjacent cabinet within reach of the power cord. A ground fault circuit interrupter (GFCI) is required for model WWD30O to reduce the risk of electrical shock. Installation must comply with all applicable electrical codes.